

# Keysight U1700 Series Handheld LCR Meters

Data Sheet



Test passive components conveniently, affordably *and* reliably with the Keysight U1700 Series LCR meters—extending the tradition of industry-leading benchtop units

## Introduction

The Keysight Technologies, Inc. U1700 Series handheld LCR meters expand Keysight's portfolio of handheld tools into electronics assembly and passive components troubleshooting. Better yet, these handheld models extends the tradition of Keysight's industry-leading benchtop units to more affordable and portable forms. Keysight's latest handheld LCR meters in all-new orange offer capabilities and functionalities equivalent to the A models.

### No waiting for quick, basic LCR tests

Sharing a bench LCR meter is practical, but isn't always convenient. With Keysight's new line of handheld LCR meters, you can perform quick, basic LCR measurements at your convenience. Now that they're available at a lower price point compared to traditional benchtop units, everyone on your team can be equipped for passive-component testing—on the bench or on the go—without the wait.

### Uncompromised quality and reliability

The handheld LCR meters are housed in robust overmold and tested to stringent industrial standards.

## Features

- 20,000 counts resolution
- Dual display with backlight (for U1732A/U1732B)
- Wide LCR ranges with 2 to 4 selectable test frequencies
- Auto-calculation of phase angle (for U1732A/U1732B), dissipation factor and quality factor
- Tolerance mode: 1%, 5% and 10% (20% with U1732A/U1732B)
- Relative mode
- Hold and Min/Max/Average recordings
- Data logging to PC with optional IR-to-USB cable



Figure 1: Automate the recording of continuous readings when you hook the U1731A/U1731B/U1732A/U1732B to a PC

## Take a closer look



Figure 2: U1732B front view

## U1731A/U1731B Electrical Specifications

Accuracy is expressed as  $\pm$  (% of reading + number of least significant digits) at 23 °C  $\pm$ 5 °C and <75% R.H.

### Resistance (Parallel Mode), Test Frequency = 120 Hz/1 kHz

Range	Maximum Display	Accuracy		Note
		@ 120 Hz	@ 1 kHz	
10 M $\Omega$	9.999 M $\Omega$	2.0% + 8	2.0% + 8	After open cal.
2000 k $\Omega$	1999.9 k $\Omega$	0.5% + 5	0.5% + 5	After open cal.
200 k $\Omega$	199.99 k $\Omega$	0.5% + 3	0.5% + 3	-
20 k $\Omega$	19.999 k $\Omega$	0.5% + 3	0.5% + 3	-
2000 $\Omega$	1999.9 $\Omega$	0.5% + 3	0.5% + 3	-
200 $\Omega$	199.99 $\Omega$	0.8% + 5	0.8% + 5	After short cal.
20 $\Omega$	19.999 $\Omega$	1.2% + 40	1.2% + 40	After short cal.

1. Specifications are based on measurements performed at the test sockets and on battery operation.
2. DUT and test leads need to be properly shielded by connecting to the guard terminal, if necessary.

## Capacitance (Parallel Mode), Test Frequency = 120 Hz

Range	Maximum Display	Accuracy		Note
		Capacitance	DF	
10 mF	19.99 mF <sup>1</sup>	3.0% + 5 (DF<0.1)	10% + 100/Cx + 5 (DF<0.1)	After short cal.
1000 μF	1999.9 μF <sup>2</sup>	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After short cal.
200 μF	199.99 μF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
20 μF	19.999 μF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
2000 nF	1999.9 nF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
200 nF	199.99 nF	0.7% + 5 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	After open cal.
20 nF	19.999 nF	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After open cal.

## Capacitance (Parallel Mode), Test Frequency = 1 kHz

Range	Maximum Display	Accuracy		Note
		Capacitance	DF	
1 mF	1.999 mF <sup>1</sup>	3.0% + 5 (DF<0.1)	10% + 100/Cx + 5 (DF<0.1)	After short cal.
200 μF	199.99 μF	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After short cal.
20 μF	19.999 μF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
2000 nF	1999.9 nF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
200 nF	199.99 nF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
20 nF	19.999 nF	0.7% + 5 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	After open cal.
2000 pF	1999.9 pF	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After open cal.

1. This reading can be extended up to 1999 MAX display with accuracy that is not specified.
2. This reading can be extended up to 19999 MAX display with accuracy that is not specified.
3. Q value is the reciprocal of DF.
4. Cx = Counts of displayed C value. E.g., If C = 88.88 μF then Cx = 8888.
5. Specifications are based on measurements performed at the test sockets and on battery operation.
6. DUT and test leads need to be properly shielded by connecting to the guard terminal, if necessary.

## Inductance (Series Mode), Test Frequency = 120 Hz

Range	Maximum Display	Accuracy		Note
		Inductance	DF	
1000 H	999.9 H	$1.0\% + (L_x/10000)\% + 5$	$2.0\% + 100/L_x + 5$	After open cal.
200 H	199.99 H	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
20 H	19.999 H	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
2000 mH	1999.9 mH	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
200 mH	199.99 mH	$1.0\% + (L_x/10000)\% + 5$	$3.0\% + 100/L_x + 5$	After short cal.
20 mH	19.999 mH	$2.0\% + (L_x/10000)\% + 5$	$10.0\% + 100/L_x + 5$	After short cal.

## Inductance (Series Mode), Test Frequency = 1 kHz

Range	Maximum Display	Accuracy		Note
		Inductance	DF	
100 H	99.99 H	$1.0\% + (L_x/10000)\% + 5$	$2.0\% + 100/L_x + 5$	After open cal.
20 H	19.999 H	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
2000 mH	1999.9 mH	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
200 mH	199.99 mH	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
20 mH	19.999 mH	$1.0\% + (L_x/10000)\% + 5$	$3.0\% + 100/L_x + 5$	After short cal.
2000 $\mu$ H	1999.9 $\mu$ H	$2.0\% + (L_x/10000)\% + 5$	$10.0\% + 100/L_x + 5$	After short cal.

1. Q value is the reciprocal of DF.
2.  $L_x$  = Counts of displayed L value. E.g., If  $L = 88.88$  H then  $L_x = 8888$ .
3. Specifications are based on measurements performed at the test sockets and on battery operation.
4. DUT and test leads need to be properly shielded by connecting to the guard terminal, if necessary.

## U1732A/U1732B Electrical Specifications

Accuracy is expressed as  $\pm$  (% of reading + number of least significant digits) at  $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$  and  $<75\%$  R.H.

### Resistance (Parallel Mode), Test Frequency = 100 Hz/120 Hz

Range	Maximum Display	Accuracy		Note
		@ 100 Hz	@ 120 Hz	
10 M $\Omega$	9.999 M $\Omega$	2.0% + 8	2.0% + 8	After open cal.
2000 k $\Omega$	1999.9 k $\Omega$	0.5% + 5	0.5% + 5	After open cal.
200 k $\Omega$	199.99 k $\Omega$	0.5% + 3	0.5% + 3	-
20 k $\Omega$	19.999 k $\Omega$	0.5% + 3	0.5% + 3	-
2000 $\Omega$	1999.9 $\Omega$	0.5% + 3	0.5% + 3	-
200 $\Omega$	199.99 $\Omega$	0.8% + 5	0.8% + 5	After short cal.
20 $\Omega$	19.999 $\Omega$	1.2% + 40	1.2% + 40	After short cal.

### Resistance (Parallel Mode), Test Frequency = 1 kHz/10 kHz

Range	Maximum Display	Accuracy		Note
		@ 1 kHz	@ 10 kHz	
10 M $\Omega$	9.999 M $\Omega$	2.0% + 8	3.5% + 10	After open cal.
2000 k $\Omega$	1999.9 k $\Omega$	0.5% + 5	2.0% + 10	After open cal.
200 k $\Omega$	199.99 k $\Omega$	0.5% + 3	1.5% + 5	-
20 k $\Omega$	19.999 k $\Omega$	0.5% + 3	1.5% + 5	-
2000 $\Omega$	1999.9 $\Omega$	0.5% + 3	1.5% + 5	-
200 $\Omega$	199.99 $\Omega$	0.8% + 5	2.0% + 10	After short cal.
20 $\Omega$	19.999 $\Omega$	1.2% + 40	2.5% + 200	After short cal.

1. Specifications are based on measurements performed at the test sockets and on battery operation.
2. DUT and test leads need to be properly shielded by connecting to the guard terminal, if necessary.

## Capacitance (Parallel Mode), Test Frequency = 100 Hz/120 Hz

Range	Maximum Display	Accuracy		Note
		Capacitance	DF	
10 mF	19.99 mF [1]	3.0% + 5 (DF<0.1)	10% + 100/Cx + 5 (DF<0.1)	After short cal.
1000 μF	1999.9 μF [2]	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After short cal.
200 μF	199.99 μF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
20 μF	19.999 μF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
2000 nF	1999.9 nF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
200 nF	199.99 nF	0.7% + 5 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	After open cal.
20 nF	19.999 nF	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After open cal.

## Capacitance (Parallel Mode), Test Frequency = 1 kHz

Range	Maximum Display	Accuracy		Note
		Capacitance	DF	
1 mF	1.999 mF [1]	3.0% + 5 (DF<0.1)	10% + 100/Cx + 5 (DF<0.1)	After short cal.
200 μF	199.99 μF	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After short cal.
20 μF	19.999 μF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
2000 nF	1999.9 nF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
200 nF	199.99 nF	0.7% + 3 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	-
20 nF	19.999 nF	0.7% + 5 (DF<0.5)	0.7% + 100/Cx + 5 (DF<0.5)	After open cal.
2000 pF	1999.9 pF	1.0% + 5 (DF<0.1)	2.0% + 100/Cx + 5 (DF<0.1)	After open cal.

## Capacitance (Parallel Mode), Test Frequency = 10 kHz

Range	Maximum Display	Accuracy		Note
		Capacitance	DF	
50 μF	50.0 μF	3.0% + 8 (DF<0.1)	12.0% + 100/Cx + 10 (DF<0.1)	After short cal.
20 μF	19.999 μF	3.0% + 6 (DF<0.2)	5.0% + 100/Cx + 8 (DF<0.2)	After short cal.
2000 nF	1999.9 nF	1.5% + 5 (DF<0.5)	1.5% + 100/Cx + 6 (DF<0.5)	-
200 nF	199.99 nF	1.5% + 5 (DF<0.5)	1.5% + 100/Cx + 6 (DF<0.5)	-
20 nF	19.999 nF	1.5% + 5 (DF<0.5)	1.5% + 100/Cx + 6 (DF<0.5)	-
2000 pF	1999.9 pF	2.0% + 6 (DF<0.5)	3.0% + 100/Cx + 6 (DF<0.1)	After open cal.
200pF	199.99 pF	3.0% + 8 (DF<0.1)	5.0% + 100/Cx + 8 (DF<0.1)	After open cal.

1. This reading can be extended up to 1999 MAX display with accuracy that is not specified.
2. This reading can be extended up to 19999 MAX display with accuracy that is not specified.
3. Q value is the reciprocal of DF.
4. Cx = Counts of displayed C value. E.g., If C = 88.88 μF then Cx = 8888.
5. Specifications are based on measurements performed at the test sockets and on battery operation.
6. DUT and test leads need to be properly shielded by connecting to the guard terminal, if necessary.



### Inductance (Series Mode), Test Frequency = 100 Hz/120 Hz

Range	Maximum Display	Accuracy		Note
		Inductance	DF	
1000 H	999.9 H	$1.0\% + (L_x/10000)\% + 5$	$2.0\% + 100/L_x + 5$	After open cal.
200 H	199.99 H	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
20 H	19.999 H	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
2000 mH	1999.9 mH	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
200 mH	199.99 mH	$1.0\% + (L_x/10000)\% + 5$	$3.0\% + 100/L_x + 5$	After short cal.
20 mH	19.999 mH	$2.0\% + (L_x/10000)\% + 5$	$10.0\% + 100/L_x + 5$	After short cal.

### Inductance (Series Mode), Test Frequency = 1 kHz


Range	Maximum Display	Accuracy		Note
		Inductance	DF	
100 H	99.99 H	$1.0\% + (L_x/10000)\% + 5$	$2.0\% + 100/L_x + 5$	After open cal.
20 H	19.999 H	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
2000 mH	1999.9 mH	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
200 mH	199.99 mH	$0.7\% + (L_x/10000)\% + 5$	$1.2\% + 100/L_x + 5$	-
20 mH	19.999 mH	$1.0\% + (L_x/10000)\% + 5$	$3.0\% + 100/L_x + 5$	After short cal.
2000 $\mu$ H	1999.9 $\mu$ H	$2.0\% + (L_x/10000)\% + 5$	$10.0\% + 100/L_x + 5$	After short cal.

### Inductance (Series Mode), Test Frequency = 10 kHz

Range	Maximum Display	Accuracy		Note
		Inductance	DF	
1000 mH	999.9 mH	$2.0\% + (L_x/10000)\% + 8$	$2.0\% + 100/L_x + 10$	-
200 mH	199.99 mH	$1.5\% + (L_x/10000)\% + 8$	$2.0\% + 100/L_x + 10$	-
20 mH	19.999 mH	$1.5\% + (L_x/10000)\% + 10$	$3.0\% + 100/L_x + 15$	After short cal.
2000 $\mu$ H	1999.9 $\mu$ H	$2.0\% + (L_x/10000)\% + 10$	$8.0\% + 100/L_x + 20$	

1. Q value is the reciprocal of DF.
2.  $L_x$  = counts of displayed L value. E.g., If  $L = 88.88$  H, then  $L_x = 8888$ .
3. Specifications are based on measurements performed at the test sockets and on battery operation.
4. DUT and test leads need to be properly shielded by connecting to the guard terminal, if necessary.

## General Specifications

Parameter	U1731A/U1731B		U1732A/U1732B	
Measurements	L/C/R/D/Q		L/C/R/D/Q/q	
Tolerance mode	1%, 5%, 10%		1%, 5%, 10%, 20%	
Test frequency (Accuracy = ±0.1% of actual test frequency)	<b>Test frequency setting</b>	<b>Actual test frequency</b>	<b>Test frequency setting</b>	<b>Actual test frequency</b>
	120 Hz 1 kHz	120 Hz 1010 Hz	100 Hz 120 Hz 1 kHz 10 kHz	100 Hz 120 Hz 1010 Hz 9.6 kHz
Measuring circuit mode	Inductance (L): Defaults to series mode Capacitance/Resistance (C/R): Defaults to parallel mode			
Display	L/C/R : Maximum display 19999 D/Q: Maximum display 999 (Auto range)			
Backlight	Available for model U1732A/U1732B			
Ranging mode	Auto and Manual			
Test signal level	~0.6 V <sub>RMS</sub>			
Measurement rate	1 reading/s, nominal			
Response time	~1 s/DUT (manual range)			
Auto power-off	~5 mins without operation			
Power supply	<ul style="list-style-type: none"> <li>- 9 V Alkaline battery (ANSI/NEDA 1604A or IEC 6LR61)</li> <li>- AC power adapter and cord available as options</li> </ul>			
Power consumption	<ul style="list-style-type: none"> <li>- ~40 mA (on battery operation)</li> <li>- 0.08 mA after auto power-off</li> </ul>			
Input protection fuse	0.1 A/250 V			
Battery life	7 hours (typical) without backlight and based on new alkaline			
Low battery indicator	 will appear when the voltage drops below ~ 6.8 V			
Operating environment	0 °C to 40 °C; 0 to 70% relative humidity (R.H.)			
Storage environment	-20 °C to 50 °C; 0 to 80% R.H. non-condensing			
Temperature coefficient	0.15 x (specified accuracy)/°C (0 °C to 18 °C or 28 °C to 40 °C)			
Weight	330 g			
Dimensions (H x W x D)	184 mm x 87 mm x 41 mm			
Safety and EMC compliance	IEC 61010-1:2001/EN 61010-1:2001 (2 <sup>nd</sup> Edition) Pollution Degree 2, IEC 61326-2-1:2005/EN 61326-2-1:2006, ICES-001:2004, AS/NZS CISPR11:2004			
Calibration	One-year calibration cycle recommended			

## Ordering Information



U1731A

U1732A

U1732B

U1731B

## Standard shipped items

Standard U1731A, U1731B, U1732A and U1732B ordering include:

- Quick Start Guide
- Certificate of Calibration (CoC)
- Alligator clip leads
- 9 V Alkaline battery

Option U1731A-SMD and U1732A-SMD ordering includes (For A series handheld LCR meters only) :  
SMD tweezer and soft carrying case in addition to the standard shipped items

## Recommended accessories



U1174A Soft carrying case



U5481A IR-to-USB cable



U1782A SMD tweezer



U1780A Power adapter and cord (according to country)




U1781A Alligator clip leads

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

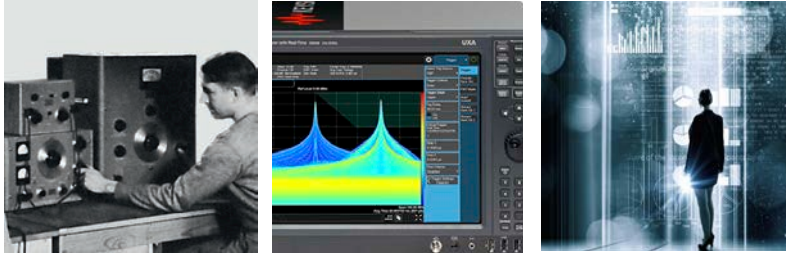

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

*Accelerate Technology Adoption.  
Lower costs.*

#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.

[www.keysight.com/find/handheldlcr](http://www.keysight.com/find/handheldlcr)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-9-7-17)

**DEKRA Certified**  
ISO 9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System



This information is subject to change without notice.  
© Keysight Technologies, 2017  
Published in USA, December 2, 2017  
5990-3458EN  
[www.keysight.com](http://www.keysight.com)